



You can now connect your installation



Self-consumption with discharge of
surpluses to the electricity grid

PROJECT: HOME OWNER
SOLAR ENERGY OFFER

Date:

18/02/2021

Content

About us	3
What training do we have?	3
What is our demonstrable experience?	4
How does self-consumption work?	6
Self-consumption installation connected to network	6
Proposed reference equipment:	7
Specific details of the proposal:	8
Budget:	12
List of materials	14
Funding application documentation:	20

KNOW US

About us

We are a dedicated company exclusively to photovoltaic solar energy.

We are accredited by the Andalusian Energy Agency, as a collaborating company..



Accreditation involves meeting a very strict set of requirements..

- ✓ Personnel with university degrees
- ✓ Officially qualified technical staff
- ✓ Electrical installation company
- ✓ Training as solar energy installers
- ✓ Energy Consulting
- ✓ Measuring equipment

What training do we have?

- Technical direction with engineers graduated in Industrial electrical branch and Telecommunication electronic equipment.
- Drafting of projects and endorsements by the competent professional associations. Drafting of energy advisory documents.
- Issuance of energy efficiency certificates.
- Issuance of prior and subsequent certificates to access grants.

What is our demonstrable experience?

To these examples we can add::

- Dozens of livestock farms
- Residential self-consumption facilities
- SMEs from various sectors
- Small solar parks for energy sales






How does self-consumption work?

It is already legal in Spain for each company to have its own electric power generation facility.

In addition, the Law allows the sale of surplus energy, in such a way that with this income from sale, the energy that will need to be purchased at night or during cloudy days can be offset.

In our electricity bill there will be a balance of the energy consumed and the energy sold..

Self-consumption installation connected to network

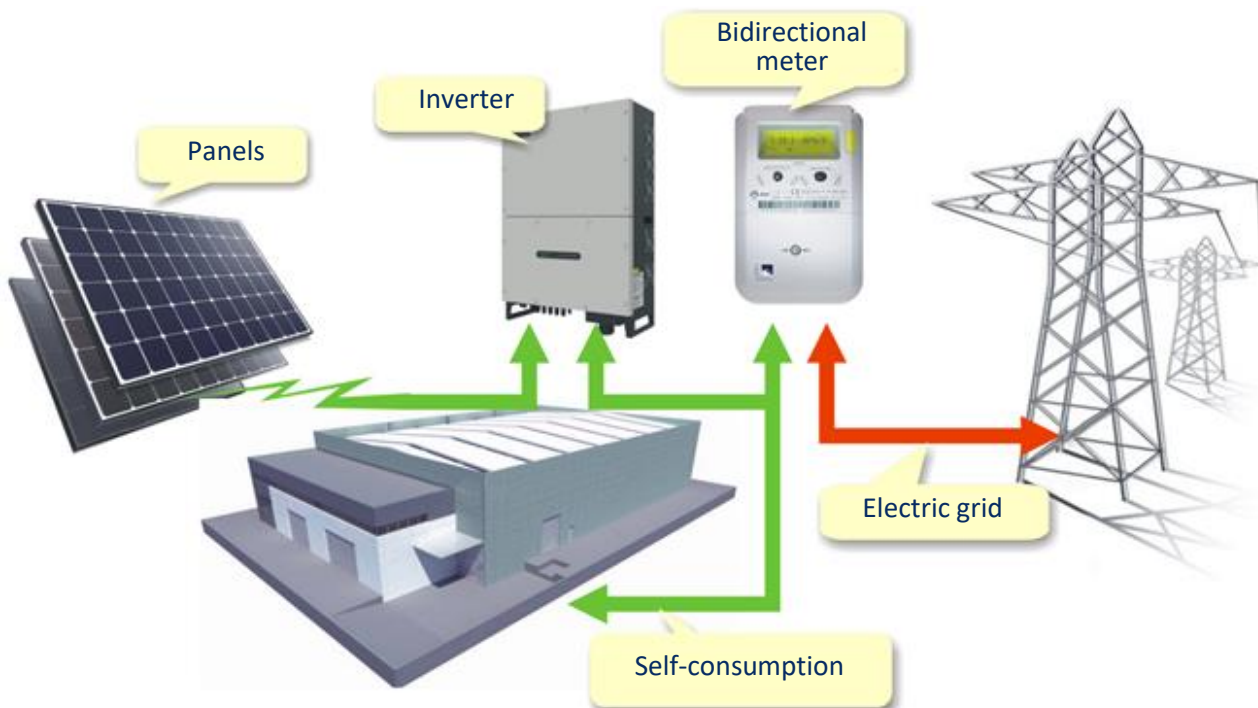

In this installation, the energy generated is used to supply existing consumption. When there is a surplus, it is injected into the network and sold.

Proposed reference equipment:

Example photo	Description
<p>SII SERIES Multiple upgrades were forged into one 390-405w</p>	<p>Solar panel TIER 1 listed Brand : Seraphim Power: 390 – 405W Series: S2 Monocrystalline Product warranty: 15 years Energy prod. Warranty : 25 years</p>
<p>JA SOLAR</p> <p>Mono 410W PERC Half-Cell Module JAM72S10 390-410/PR Series</p> <p>Introduction Assembled with high-efficiency PERC cells, the half-cell configuration of the modules offers the advantages of higher power output, better temperature-dependent performance, reduced shading effect on the energy generation, lower risk of hot spot, as well as enhanced tolerance for mechanical loading.</p>	<p>Solar panel TIER 1 listed Brand : JA SOLAR Power: 390 – 410W Series: 72S Monocrystalline Product warranty: 12 years Energy prod. Warranty : 25 years</p>
<p>INVERTER</p> <p>HUAWEI SUN2000 - SERIES</p>	<p>Manufacturer: HUWAEI Inverters from 33kw to 105Kw Designed for solar gardens, with a high voltage output of 1,000V, to group them and add power, they are modular, direct inputs from solar panels. Wide range of available powers. They communicate with a central using their own network cables. Self-diagnosis, remotely controlled.</p>

Specific details of the proposal:

This study has been carried out, with typical semidetached villa consumption data.

Making an estimated valuation of the billing and what the amount of that same consumption would have been if it had installed photovoltaic solar energy.

In any case, there is a factor that cannot be eliminated, it is the so-called power term or fixed part of the bill. This amount is not determined by consumption, if not by the contracted energy, it can only be reduced if the owner agrees to reduce the energy contracted with the supply company.

Regarding the variable part of the energy bill, which corresponds to the consumption measured during the month, this amount can be significantly reduced, even in some months it will be "Zero Euros", although this does not always happen, in general terms we can say that annual saving is over 60%.

IMPORTANT NOTE: Take in mind that Marbella City Hall has a special discount in the IBI taxes, of 25% during 5 years , this means 125% of IBI value returned, available for home owners that install solar energy.

Installation improvements

It is necessary to make the house more energy efficient. For which it is proposed to make changes:

Change the power contracted to the electricity company for a cheaper rate
Change the rate to a double rate (night / day)



Install home automation equipment controlled by mobile phone.



Timers for hot water heaters


Timer for pool heating pump
Timer for pool filter pump

Change all the 50W halogen lights for 6W LEDs
Change the dimmer regulator for one for LEDs

Install several timers to the heating radiators, so that they operate alternately during the night and the day.

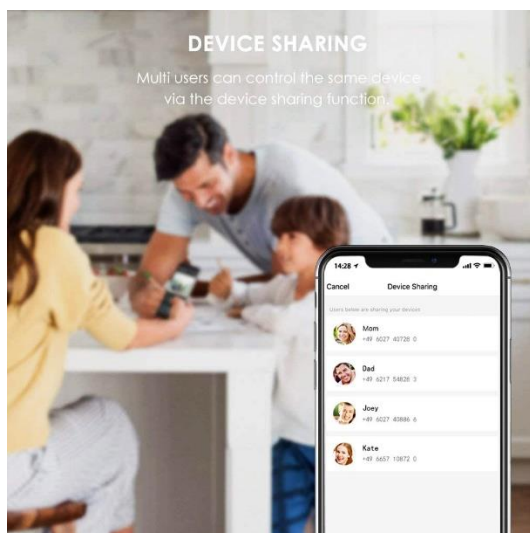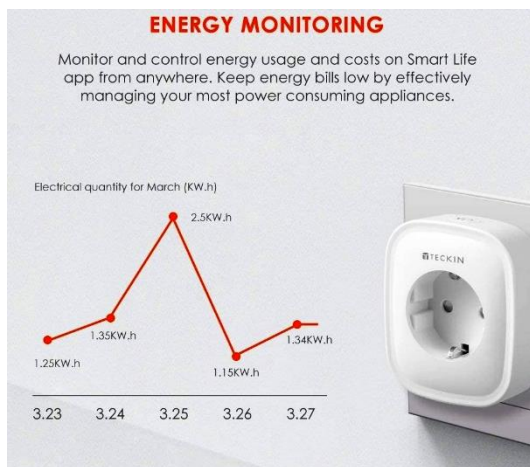

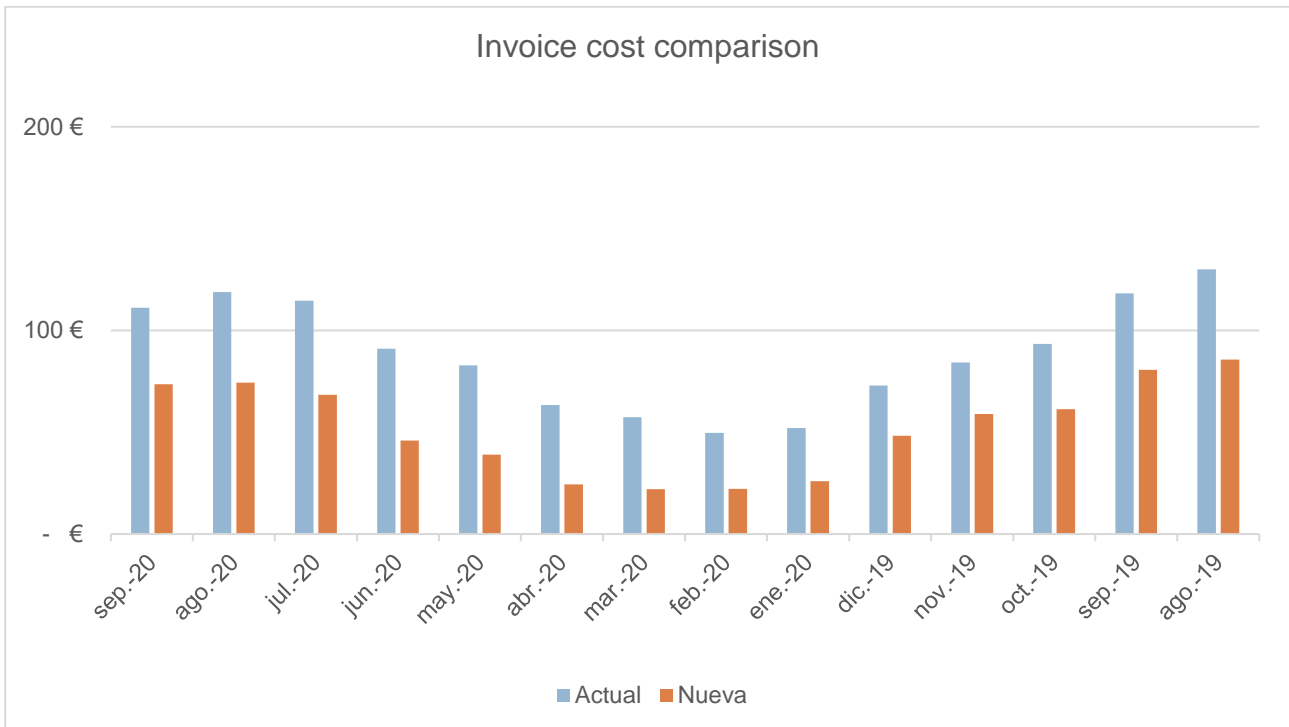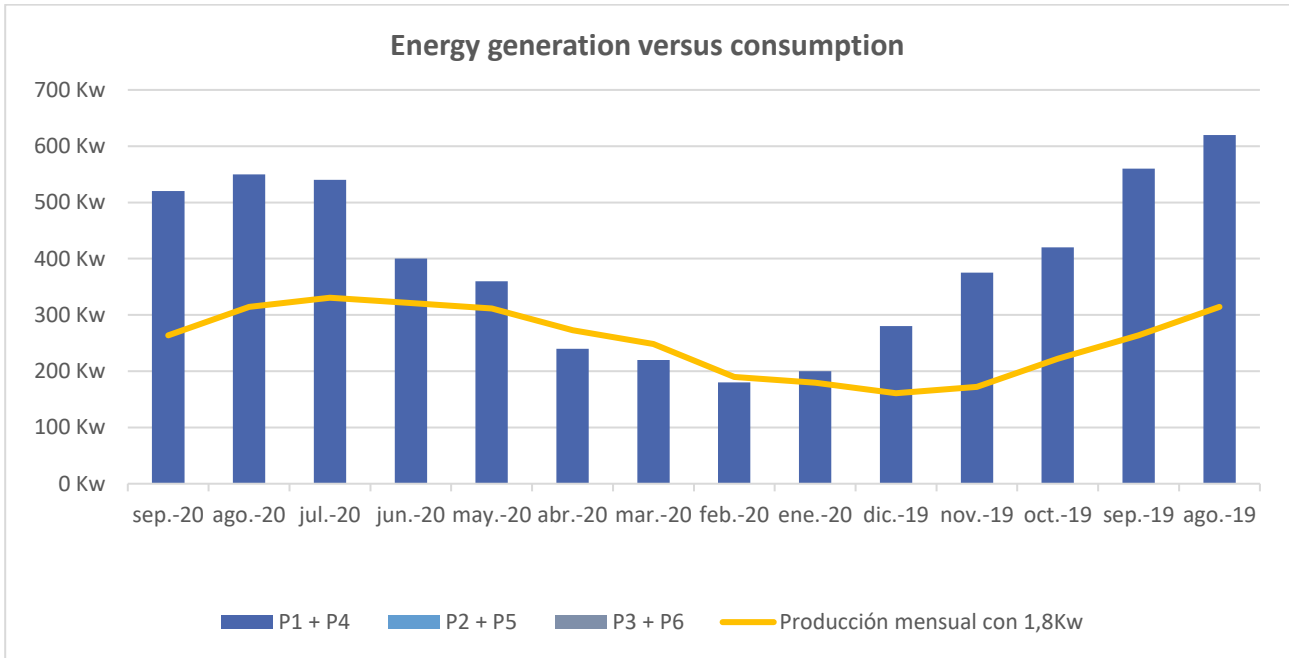

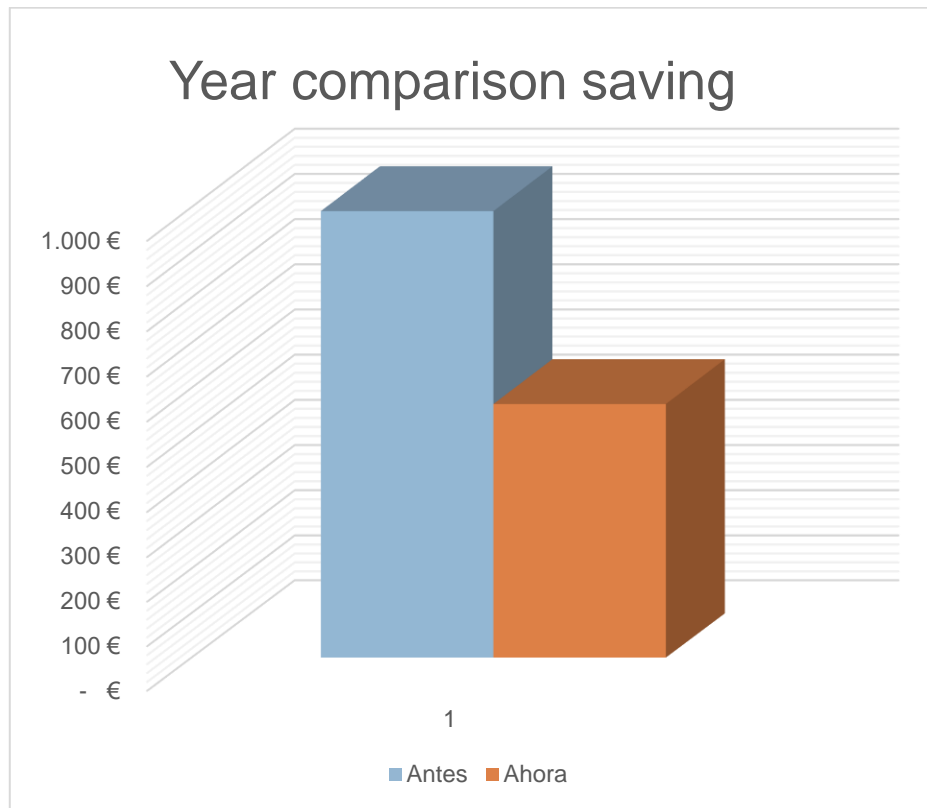

CO2 saved (year): 2.111 Kg

Equivalent trees per year : 56

Budget:

Solarenergy Sur SL. NIF: 01955145 - Avda. Los Pinos 42, Marbella - Málaga

Proforma invoice: 44245	Date : 18/02/21
Customer : HOME OWNER	NIF :
Domicilio : URB SAMISOL	C. P. :
Address : MARBELLA	Province : MALAGA
Phone:	Mail :

Self-consumption with compensation of surpluses, with 1.800 Wpeak

MATERIALS AND LABOR	Unit	Mat	TOTAL
FIJ8 Estructura ángulo ajustable a 20-30	4	72,16 €	288,64 €
PB Panel solar monocristalino 450W	4	198,00 €	792,00 €
Potencia en paneles = 1800 W			
INV8 Huawei Inverter 2Kw , V-120-600V 1 mppt	1	924,00 €	924,00 €
System peak power = 2000 W			
Pipes, cables and gutters	1	57,66 €	57,66 €
Electrical box and electrical safety elements	1	150,00 €	150,00 €
Miscellaneous (fuse box, diodes, meters)	1	46,20 €	46,20 €
Labor and commissioning	1	669,31 €	669,31 €
Total budget included labour and materials			2.927,81 €
	Discount	7%	-204,95 €
Final price without Taxes			2.722,86 €
TOTAL PRICE 21% VAT INCLUDED			3.294,66 €

ECONOMIC AND ENERGY ANALYSIS

Installation location : MARBELLA - Province : MALAGA

Sun hours (year)	1.659
Year energy production	2.987 Kw/año
Energy price paid	160,00 €/Mw
Money saved per year	478 €
Return time (years)	6,9



30 months credit 0% Interest

113,12 € per month

60 months credit at 4% interest (no fees)

61,00 € per month

FINANCIAL SUGGESTIONS




Credit line example

Investment	3.295 €	VAT INCL
Year interest	4,00%	Not binding
Amortization period	5 years	
Monthly payments	12 months	
Monthly fee	61,00 €	

Other financial options

Amortization period (years)	7
Monthly payments	45,00 €
Amortization period (years)	10
Monthly payments	33,00 €

List of materials

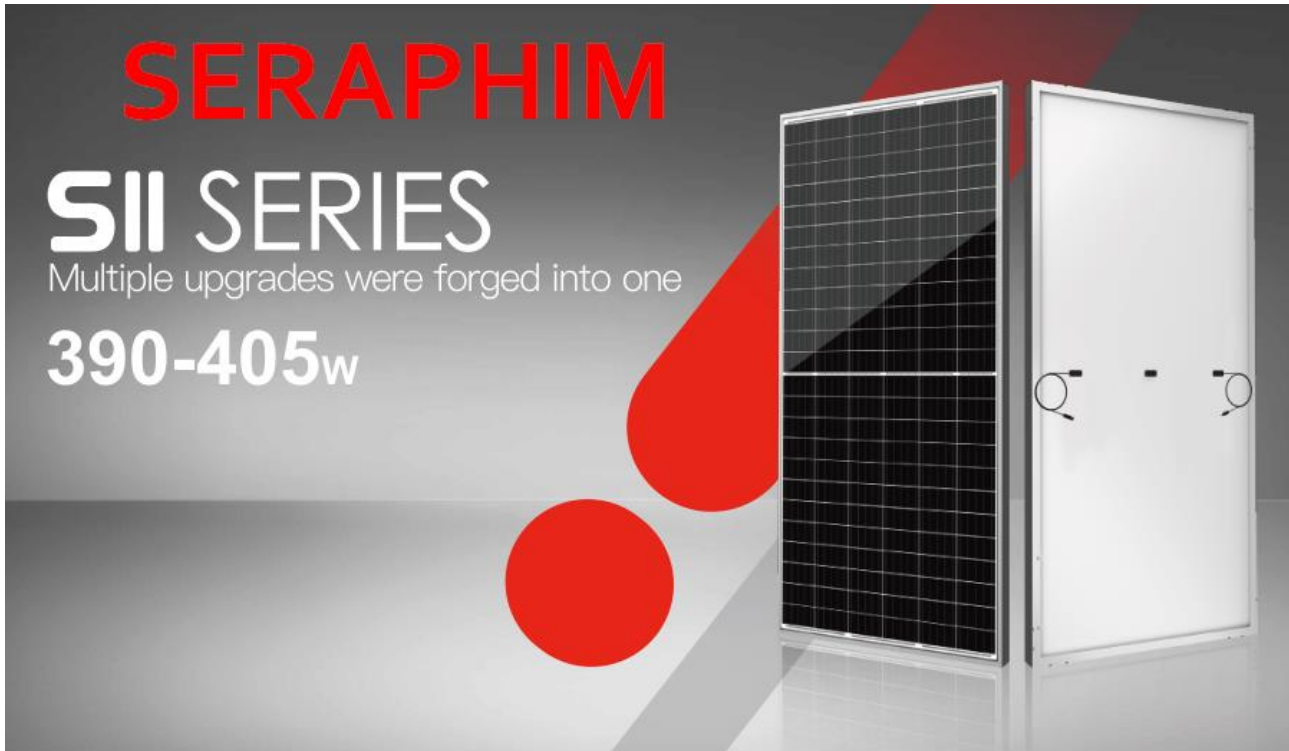

• SII SERIES

Seraphim redefined the high-efficiency module series by integrating 158.75mm silicon wafers with PERC and half-cut cell technologies. Seraphim panel combined creative technology effectively and extremely improved the module efficiency and power out.

• KEY FEATURES

- Less mismatch to get more power
- Less power loss by minimizing the shading impact
- Competitive low light performance
- 3 times EL test to ensure best quality
- Ideal choice for utility and commercial scale projects by reduced BOS and improve ROI.
- Outstanding reliability proven by PVEL for stringent environment condition :
 - sand, acid, and alkali, hail stones,
 - 2400pa wind load and 5400pa snow load.
 - Anti-PID

• QUALITY SYSTEM

ISO19001 / ISO14001 / OHSAS18001

• PRODUCT CERTIFICATION



• INSURANCE



• WARRANTY



15 YEARS Guarantee on product material and workmanship

25 YEARS linear power output warranty




SHIFTING • THE FUTURE
www.seraphim-energy.com

Electrical Characteristics

Module Type	SRP-390-BMA-HV	SRP-395-BMA-HV	SRP-400-BMA-HV	SRP-405-BMA-HV
	STC	STC	STC	STC
Maximum Power at STC (Pmp)	390	395	400	405
Open Circuit Voltage (Voc)	48.7	48.9	49.1	49.4
Short Circuit Current (Isc)	9.95	10.03	10.10	10.15
Maximum Power Voltage (Vmp)	41.2	41.4	41.6	41.9
Maximum Power Current (Imp)	9.47	9.55	9.62	9.67
Module Efficiency at STC(ηm)	19.32	19.56	19.81	20.06
Power Tolerance	(0,+4.99)			
Maximum System Voltage	1500 VDC			
Maximum Series Fuse Rating	20A			

STC: Irradiance 1000 W/m² module temperature 25°C AM=1.5;

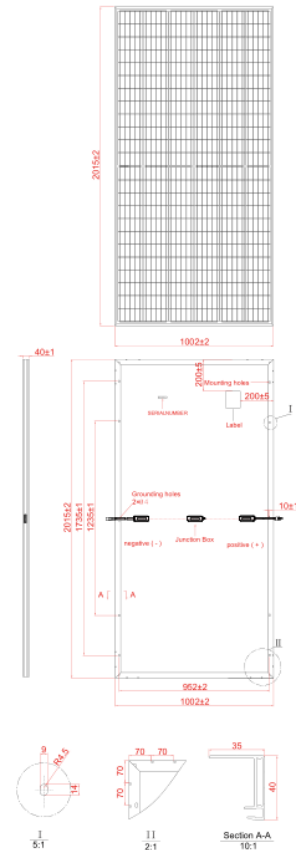

Temperature Characteristics

Pmax Temperature Coefficient	-0.36 %/°C
Voc Temperature Coefficient	-0.28 %/°C
Isc Temperature Coefficient	+0.05 %/°C
Operating Temperature	-40 ~ +85 °C
Nominal Operating Cell Temperature (NOCT)	45±2 °C

Mechanical Specifications


External Dimensions	2015 x 1002 x 40 mm
Weight	23.0kg
Solar Cells	PERC Mono crystalline 158.75 × 79.375 mm(144pcs)
Front Glass	3.2 mm AR coating tempered glass, low iron
Frame	Anodized aluminium alloy
Junction Box	IP68, 3 diodes
Output Cable	4.0 mm ² , Portrait:255mm(+)/355mm(-);Landscape:1200mm
Mechanical Load	Front side 5400Pa/ Back side 2400Pa

Packing Configuration

	2015 x 1002 x 40 mm	
Container	20'GP	40'HQ
Pieces per Pallet	27	27+2*
Pallets per Container	10	22
Pieces per Container	270	638

* 27+2 pieces per pallet is the special package which only suits for container transport.
For details, please consult SERAPHIM.

I-V Curve

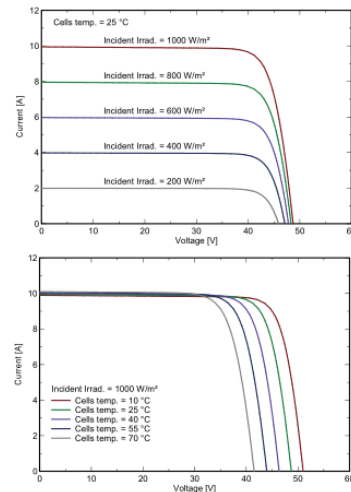



Higher output power



Lower temperature coefficient



Less shading effect



Better mechanical loading tolerance

Superior Warranty

- 12-year product warranty
- 25-year linear power output warranty




■ JA Linear Power Warranty ■ Industry Warranty

Comprehensive Certificates

- IEC 61215, IEC 61730, IEC TS 62804
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- OHSAS 18001: 2007 Occupational health and safety management systems
- IEC TS 62941: 2016 Terrestrial photovoltaic (PV) modules – Guidelines for increased confidence in PV module design qualification and type approval



MECHANICAL DIAGRAMS

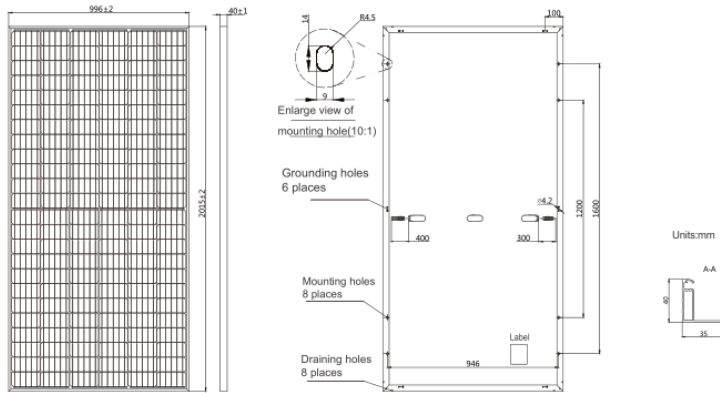

Remark: customized frame color and cable length available upon request

SPECIFICATIONS

Cell	Mono
Weight	22.7kg±3%
Dimensions	2015±2mm×996±2mm×40±1mm
Cable Cross Section Size	4mm ²
No. of cells	144 (6×24)
Junction Box	IP68, 3 diodes
Connector	MC4 Compatible(1000V) QC 4.10-35(1500V)
Packaging Configuration	27 Per Pallet

ELECTRICAL PARAMETERS AT STC

TYPE	JAM72S10 -390/PR	JAM72S10 -395/PR	JAM72S10 -400/PR	JAM72S10 -405/PR	JAM72S10 -410/PR
Rated Maximum Power(Pmax) [W]	390	395	400	405	410
Open Circuit Voltage(Voc) [V]	48.91	49.21	49.50	49.81	50.12
Maximum Power Voltage(Vmp) [V]	40.55	40.85	41.17	41.46	41.76
Short Circuit Current(Isc) [A]	10.16	10.21	10.26	10.32	10.37
Maximum Power Current(Imp) [A]	9.62	9.67	9.72	9.77	9.82
Module Efficiency [%]	19.4	19.7	19.9	20.2	20.4
Power Tolerance	0~+5W				
Temperature Coefficient of Isc(α _{Isc})	+0.051%/°C				
Temperature Coefficient of Voc(β _{Voc})	-0.289%/°C				
Temperature Coefficient of Pmax(γ _{Pmp})	-0.360%/°C				
STC	Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G				


Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

ELECTRICAL PARAMETERS AT NOCT


TYPE	JAM72S10 -390/PR	JAM72S10 -395/PR	JAM72S10 -400/PR	JAM72S10 -405/PR	JAM72S10 -410/PR	OPERATING CONDITIONS
Rated Max Power(Pmax) [W]	289	292	296	300	303	Maximum System Voltage 1000V/1500V DC(IEC)
Open Circuit Voltage(Voc) [V]	45.04	45.30	45.56	45.81	46.06	Operating Temperature -40°C~+85°C
Max Power Voltage(Vmp) [V]	37.29	37.52	37.76	38.03	38.28	Maximum Series Fuse 20A
Short Circuit Current(Isc) [A]	8.18	8.23	8.28	8.33	8.38	Maximum Static Load,Front 5400Pa
Max Power Current(Imp) [A]	7.74	7.79	7.84	7.88	7.93	Maximum Static Load,Back 2400Pa
NOCT	Irradiance 800W/m ² , ambient temperature 20°C, wind speed 1m/s, AM1.5G					NOCT 45±2°C
						Application Class Class A

CHARACTERISTICS


Current-Voltage Curve JAM72S10-400/PR

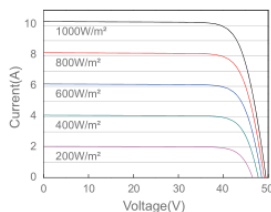

Power-Voltage Curve JAM72S10-400/PR

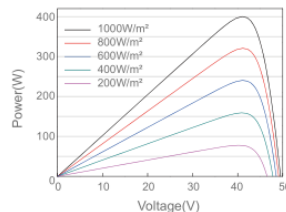

Current-Voltage Curve JAM72S10-400/PR

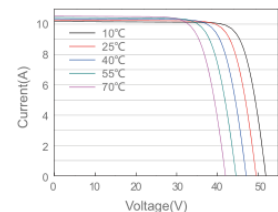

Premium Cells, Premium Modules

Version No. : Global_EN_20181126A

Smart String Inverter

SUN2000 – 105KTL-H1



Smart

- 12 strings intelligent monitoring and fast trouble-shooting
- Power Line Communication (PLC) supported
- Smart I-V Curve Diagnosis supported

Safe

- DC switch integrated, safe and convenient for maintenance
- Residual Current Monitoring Unit (RCMU) integrated
- Fuse free design

Efficient



- Max. efficiency 99.0%
- European Efficiency 98.8%
- 6 MPPT per unit, effectively reducing string mismatch

Reliable

- Natural cooling technology
- Protection degree of IP65
- Type II surge arresters for both DC and AC

Smart String Inverter (SUN2000-105KTL-H1)

Technical Specifications	SUN2000-105KTL-H1
	Efficiency
Max. Efficiency	99.0%
European Efficiency	98.8%
	Input
Max. Input Voltage	1,500 V
Max. Current per MPPT	25 A
Max. Short Circuit Current per MPPT	33 A
Start Voltage	650 V
MPPT Operating Voltage Range	600 V ~ 1,500 V
Rated Input Voltage	1,080 V
Number of Inputs	12
Number of MPP Trackers	6
	Output
Rated AC Active Power	105,000 W @40°C
Max. AC Apparent Power	116,000 VA @25°C
Max. AC Active Power (cosφ=1)	116,000 W @25°C
Rated Output Voltage	800 V, 3W + PE
Rated AC Grid Frequency	50 Hz / 60 Hz
Rated Output Current	75.8 A
Max. Output Current	84.6 A
Adjustable Power Factor Range	0.8 LG ... 0.8 LD
Max. Total Harmonic Distortion	< 3%
	Protection
Input-side Disconnection Device	Yes
Anti-islanding Protection	Yes
AC Overcurrent Protection	Yes
DC Reverse-polarity Protection	Yes
PV-array String Fault Monitoring	Yes
DC Surge Arrester	Type II
AC Surge Arrester	Type II
DC Insulation Resistance Detection	Yes
Residual Current Monitoring Unit	Yes
	Communication
Display	LED Indicators, Bluetooth + APP
RS485	Yes
USB	Yes
Power Line Communication (PLC)	Yes
	General
Dimensions (W x H x D)	1,075 x 605 x 310 mm (42.3 x 23.8 x 12.2 inch)
Weight (with mounting plate)	79 kg (174.2 lb.)
Operating Temperature Range	-25°C ~ 60°C (-13°F ~ 140°F)
Cooling Method	Natural Convection
Max. Operating Altitude	4,000 m (13,123 ft.)
Relative Humidity	0 ~ 100%
DC Connector	Amphenol UTX
AC Connector	Waterproof PG Terminal + OT terminal
Protection Degree	IP65
Topology	Transformerless
	Standard Compliance (more available upon request)
Certificate	EN 62109-1/-2, IEC 62109-1/-2, IEC 62116, EN 50530, IEC 60068, IEC 61683
Grid Code	IEC 61727, ABNT NBR 16149, ABNT NBR 16150, ABNT NBR IEC 62116, VDE4120, RD 1699, RD 661, RD 413, RD 1565, UNE 206007-1 IN, UNE 206006 IN, P.O. 12.3, UTE C15-712-1, G59/3, CEI 0-16

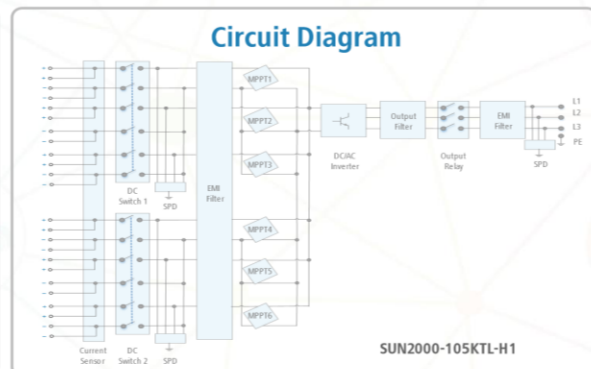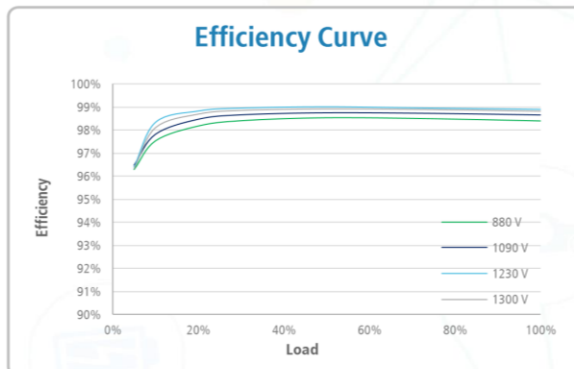

Funding application documentation:

- 1. Deed of incorporation and granting of powers.***
- 2. Identification document of the company (NIF).***
- 3. DNI of the administrator and / or the signer.***
- 4. Information on the annual accounts for the last two years, including the attached report.***
- 5. Declaration of Corporation Tax and the Commercial Registry.***
- 6. Model 347 and 390 of 2.018***
- 7. Model 303 for all quarters of 2018 and 2019***
- 8. Model 200 (IS) of 2017 and 2018***
- 9. Proof of payment of Social Security and Finance.***
- 10. VAT returns for the last fiscal year and provisional balances for the current fiscal year.***
- 11. Declaration of assets of the company.***
- 12. "Bank Pool", list of bank accounts with which it operates.***